AV-533 Stainless Steel Reducing Socket, PN-20

Features


Threading	BSP / NPT
Grade	CF8 (SS 304) / CF8M (SS 316)
Tolerance	±1.5mm
Pressure Rating	PN-20 (Hyd. 30kg)
Max. Working Pressure	290 Psig
Application Medium	Food Processing



Notes
Also available in CF8M (SS 316)

Product Standard :- ISO – 4144

Suitability
Water

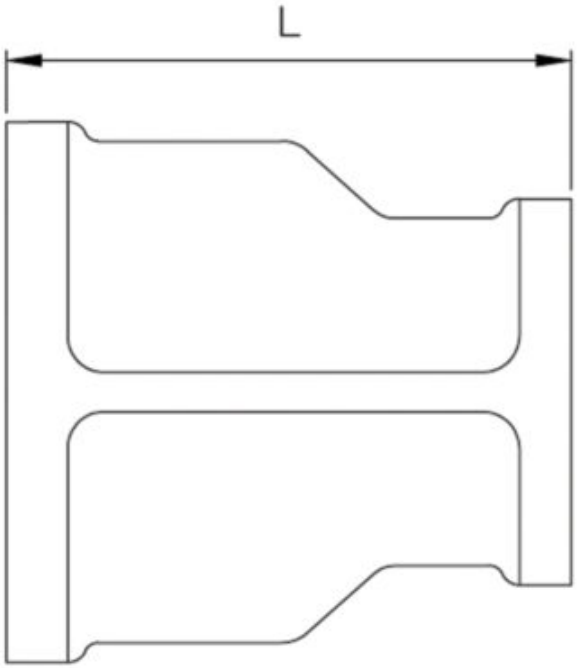

Dimensional Data

Size	L
3/8” x 1/4”	26
1/2” x 1/4”	34
1/2” x 3/8”	34
3/4” x 1/4”	36
3/4” x 1/2”	36
1” x 3/8”	42
1” x 1/2”	42
1” x 3/4”	42

Atam Valves Private Limited
1051, Outside Industrial Area,
Jalandhar – 144004. Punjab. INDIA

https://www.atamvalves.in

Phone : +91 181 5001111
Fax: +91 181 2290611
Email : sales@atamfebi.com

1.1/4” x 1/2”	48
1.1/4” x 3/4”	48
1.1/4” x 1”	48
1.1/2” x 1.1/4”	52
1.1/2” x 1”	52
1.1/2” x 3/4”	52
2” x 1.1/2”	58
2” x 1.1/4”	58
2” x 1”	58

Atam Valves Private Limited
1051, Outside Industrial Area,
Jalandhar – 144004. Punjab. INDIA

https://www.atamvalves.in

Phone : +91 181 5001111
Fax: +91 181 2290611
Email : sales@atamfebi.com