

## AV-238 Bronze Sight Flow indicator, Screwed Ends

### Features

|                            |  |
|----------------------------|--|
| Body Material Cum Standard | Bronze (IBR 282 (a) (iv) Gr. B)          |
| Product Description        | Single Window with Toughened Glass       |
| Trim                       | Cu-Alloy                                 |
| End Details                | Screwed Female BSP Taper Threads (BS-21) |
| Test Pressure              | Body: 500 Psig (Hyd.)                    |
| Max. Working Pressure      | 250 Psig (Steam)                         |
| Max. Working Temperature   | 225°C                                    |

### Notes

Test Certificate in Form III-C as per IBR is furnished with every supply.


### Suitability

Water, Steam



### Material Combination

| S.No | Description | No. | Material  |
|------|-------------|-----|-----------|
| 1    | Cover       | 1   | Bronze    |
| 2    | Gasket      | 1   | C.A.F.    |
| 3    | Glass       | 1   | Toughened |
| 4    | Body        | 1   | Bronze    |

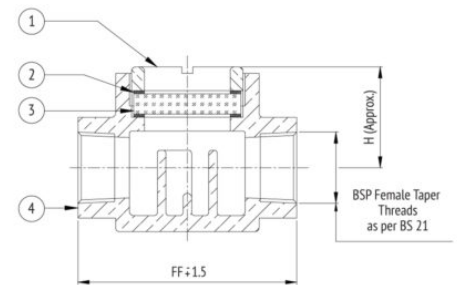

### Dimensional Data

| Size (mm) | FF  | H  | T      |
|-----------|-----|----|--------|
| 15        | 89  | 40 | 1/2"   |
| 20        | 92  | 42 | 3/4"   |
| 25        | 102 | 47 | 1"     |
| 32        | 105 | 52 | 1.1/4" |
| 40        | 110 | 55 | 1.1/2" |
| 50        | 115 | 62 | 2"     |