

AV-28 Bronze Horizontal Lift Check Valve (Screwed Ends)

Features

Screwed in Cover with Teflon Disc, Screwed female BSP threads as per BS-21

Test Pressure

Body : 500 Psig (Hyd.)
Seat : 250 Psig (Hyd.)
Seat : 100 Psig (Air)

Testing Standard

BS EN 12266 Part-1

Note

Other Screwed End Specification can be provided on request.


Suitability

Water, Gas, Oil, Air



Material Combination

P.No.	Name of Part	Material	Specification
1	Body	Bronze	BS 1400 LG2
2	Disc Guide	Bronze	BS 1400 LG2
3	Disc	PTFE (Teflon)	BS EN 12086-1
4	Disc Holder	Bronze	BS 1400 LG2
5	Cover	Bronze	BS 1400 LG2

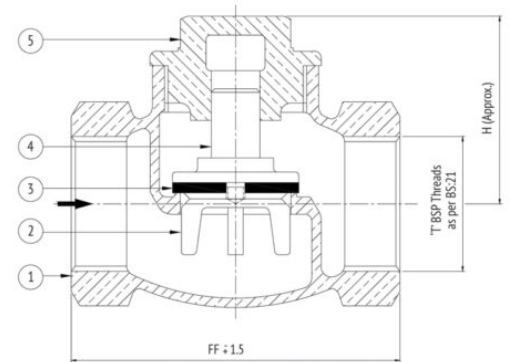

Dimensional Data

Nominal Size (mm)	FF	T	H
15	56	1/2"	42
20	68	3/4"	50
25	78	1"	60
32	87	1.1/4"	64
40	102	1.1/2"	74
50	119	2"	85
65	136	2.1/2"	96
80	170	3"	108
100	200	4"	135