

AV-34 Bronze Horizontal Lift Check Valve (Screwed Ends)

Features

Screwed on Bonnet, Renewable Seat, Screwed BSP Threads as per BS-21

Test Pressure

Body : 600 Psig (Hyd.)

Seat : 300 Psig (Hyd.)

Working Pressure : 150 Psig (Steam)

Testing Standard

BS EN 12266 Part-1


Suitability

Water, Steam, Oil



Material Combination

P.No.	Name of Part	Material	Specification
1	Body	Bronze	BS 1400 LG2
2	Seat Ring	Stainless Steel	ASTM A276 Type 410
3	Disc	Stainless Steel	ASTM A276 Type 410
4	Cover	Bronze	BS 1400 LG2

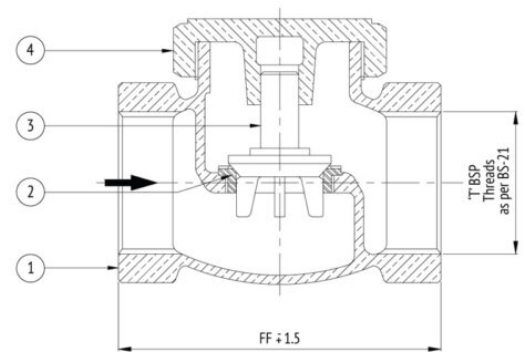

Dimensional Data

Nominal Size (mm)	FF	T	H
15	70	1/2"	44
20	85	3/4"	55
25	95	1"	65
32	110	1.1/4"	70
40	118	1.1/2"	74
50	145	2"	88
65	162	2.1/2"	102
80	203	3"	110
100	248	4"	125