

## AV-79 Bronze Vertical Lift Check Valve (Screwed Ends)

### Features

Spring Loaded, Vertical Type, Integral Seat, Screwed Female Threads as per BS21

### Test Pressure

Body : 300 Psig (Hyd.)

Seat Pressure : 200 Psig (Hyd.) 80 Psig (Air)

### Testing Standard

MSS SP-80

### Note

Rubber Disc also available


### Suitability

Water, Oil, Air



### Material Combination

P.No.	Name of Part	Material	Specification
1	Body	Bronze	ASTM B62
2	Disc	Bronze	ASTM B62
3	Spring	Stainless Steel	AISI 304
4	Washer	Brass	IS 6912 Gr.FLB
5	Nut	Brass	IS 6912 Gr.FLB

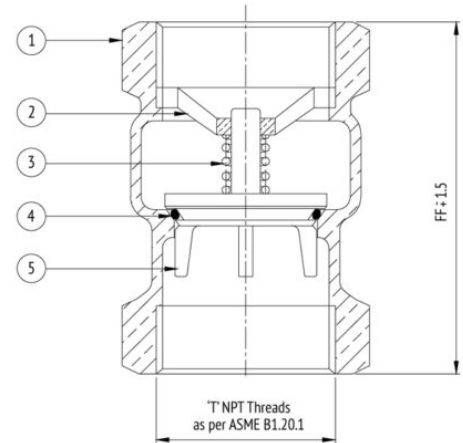

### Dimensional Data

Nominal Size (mm)	FF	T
15	65	1/2"
20	70	3/4"
25	75	1"
32	85	1.1/4"
40	95	1.1/2"
50	110	2"
65	130	2.1/2"
80	145	3"
100	190	4"