

AV-531 Stainless Steel Cross, PN-25


Features

Threading	BSP / NPT
Grade	CF8 (SS 304) / CF8M (SS 316)
Tolerance	±1.5mm
Pressure Rating	PN-25 (Hyd. 30kg)
Max. Working Pressure	356 Psig
Application Medium	Food Processing

Notes

Also available in CF8M (SS 316)

Suitability

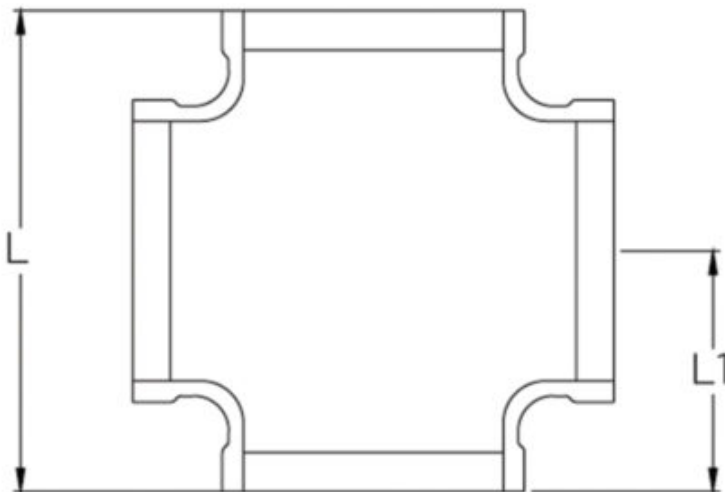

Dimensional Data

Size	L	L1
1/4"	40	20
3/8"	48	24
1/2"	56	28
3/4"	66	33
1"	80	40
1.1/4"	92	46
1.1/2"	100	50
2"	116	58



Manufacturers & Exporters of
Valves, Fittings & Boiler Mountings

Size	L	L1
2.1/2"	138	69
3"	156	78
4"	192	96