

## AV-533 Stainless Steel Reducing Socket, PN-25


### Features

Threading	BSP / NPT
Grade	CF8 (SS 304) / CF8M (SS 316)
Tolerance	±1.5mm
Pressure Rating	PN-25 (Hyd. 30kg)
Max. Working Pressure	356 Psig
Application Medium	Food Processing

### Notes

Also available in CF8M (SS 316)

### Suitability

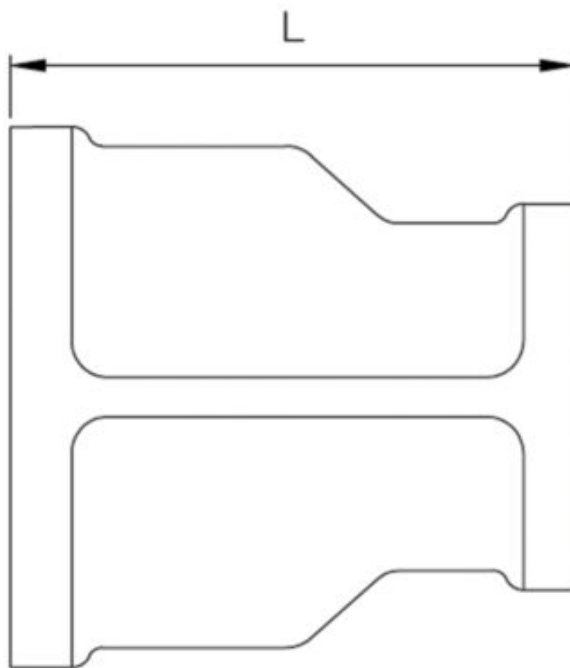

### Dimensional Data

Size	L
3/8" x 1/4"	26
1/2" x 1/4"	34
1/2" x 3/8"	34
3/4" x 1/4"	36
3/4" x 1/2"	36
1" x 3/8"	42
1" x 1/2"	42
1" x 3/4"	42

Size	L
1.1/4" x 1/2"	48
1.1/4" x 3/4"	48
1.1/4" x 1"	48
1.1/2" x 1.1/4"	52
1.1/2" x 1"	52
1.1/2" x 3/4"	52
2" x 1.1/2"	58
2" x 1.1/4"	58
2" x 1"	58