

AV-541 Stainless Steel Hex Nipple, PN-25


Features

Threading	BSP / NPT
Grade	CF8 (SS 304) / CF8M (SS 316)
Tolerance	±1.5mm
Pressure Rating	PN-25 (Hyd. 30kg)
Max. Working Pressure	356 Psig
Application Medium	Food Processing

Notes

Also available in CF8M (SS 316)

Suitability

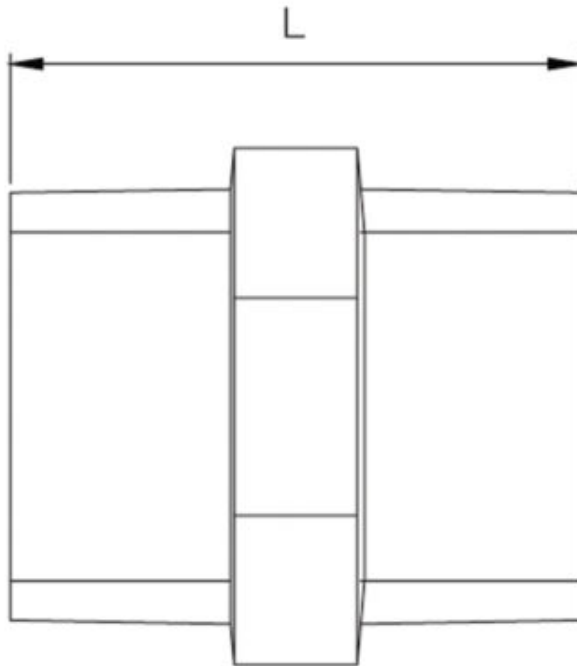

Dimensional Data

Size	L
1/4"	34
3/8"	36
1/2"	42
3/4"	48
1"	50
1.1/4"	56
1.1/2"	57
2"	60



Manufacturers & Exporters of
Valves, Fittings & Boiler Mountings

Size	L
2.1/2"	62
3"	67.5
4"	80