

AV-539 Stainless Steel Socket, PN-25


Features

Threading	BSP / NPT
Grade	CF8 (SS 304) / CF8M (SS 316)
Tolerance	±1.5mm
Pressure Rating	PN-25 (Hyd. 30kg)
Max. Working Pressure	356 Psig
Application Medium	Food Processing

Notes

Also available in CF8M (SS 316)

Suitability

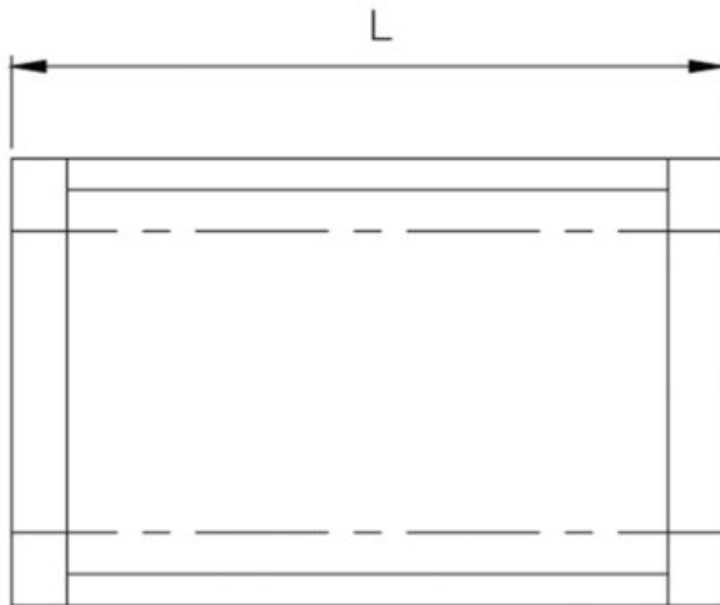

Dimensional Data

Size	D
1/4"	24
3/8"	26
1/2"	37
3/4"	37
1"	45
1.1/4"	50
1.1/2"	50
2"	58



Manufacturers & Exporters of
Valves, Fittings & Boiler Mountings

Size	D
2.1/2"	65
3"	71
4"	83