

AV-546 Stainless Steel Hex Head Plug, PN-25


Features

Threading	BSP / NPT
Grade	CF8 (SS 304) / CF8M (SS 316)
Tolerance	±1.5mm
Pressure Rating	PN-25 (Hyd. 30kg)
Max. Working Pressure	356 Psig
Application Medium	Food Processing

Notes

Also available in CF8M (SS 316)

Suitability

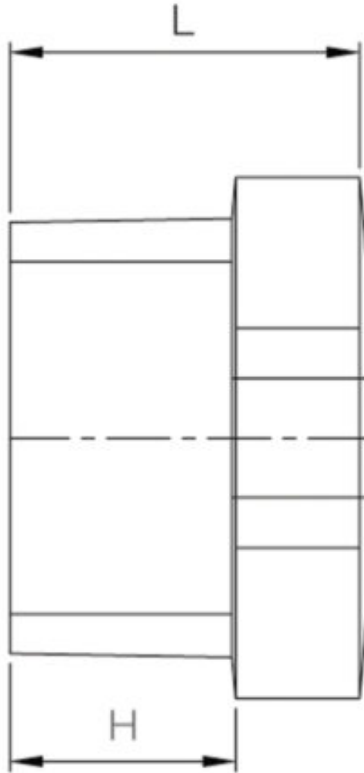

Dimensional Data

Size	H	L
1/4"	12	16
3/8"	13	17
1/2"	16	22
3/4"	17	23
1"	20	27
1.1/4"	22	30
1.1/2"	22	30
2"	24	34



Manufacturers & Exporters of
Valves, Fittings & Boiler Mountings

Size	H	L
2.1/2"	29	35
3"	29	38
4"	45	40