

AV-110 Bronze Gate Valve (Screwed Ends) PN 16

Features

Screwed in Bonnet, Inside Screw, Rising Stem, Without Yoke, Screwed or parallel Threads IS 554

Test Pressure

Body - 24 Bar (Hyd.)

Seat - 16 Bar (Hyd.)


Suitability

Water, Oil



Material Combination

P.No.	Name of Part	Material	Specification
1	Body	Bronze	ASTM B62
2	Wedge	Bronze	ASTM B62
3	Stem	Brass	IS 6912 Gr.FLB
4	Bonnet	Bronze	ASTM B62
5	Packing	Graphited Asbestos	-
6	Gland	Bronze	ASTM B62
7	Gland Nut	Bronze	ASTM B62
8	Handwheel	M.I.	-

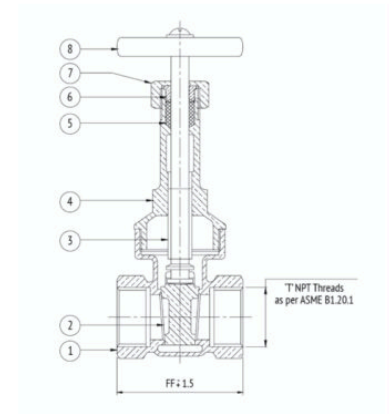

Dimensional Data

Nominal Size (mm)	FF	T
15	60	1/2"
20	60	3/4"
25	70	1
32	80	1.1/4"
40	90	1.1/2"
50	100	2"
65	105	2.1/2"
80	125	3"
100	160	4"