FV-507 Investment Casting Stainless Steel (CF8) Ball Valve, Screwed Ends

Features

Product Standard	BS EN 17292
Body Material Cum Standard	Cast Stainless Steel (ASTM A351 Gr. CF8)
Port Opening	Full Bore
Product Description	Two Piece Design, Lever Operated (Blow Out Proof Stem)
Type of Seat	Renewable Seat
Trim	Ball & Stem: Stainless Steel (AISI 304), PTFE Seats
End Details	Screwed Female BSP Parallel Threads (BS-21), Socket Welded Ends as per ASME B16.11
Test Pressure	Body: 2000 Psig (Hyd.), Seat: 1000 Psig (Hyd.), Seat: 100 Psig (Air)
Max. Working Pressure	150 Psig (Steam)




Notes
Suitable for steam service with specialized PTFE.
Can be provided with Glass Filled PTFE, Graphite Blended PTFE & PEEK Seats on request.
Other screwed end specifications can be provided on request.

Suitability
Water, Steam, Gas, Oil, Air

Material Combination

S.No	Description	No.	Material	Specifications
1	Stem	1	Stainless Steel	AISI 304
2	Locking Nut	1	Stainless Steel	AISI 304
3	Lever	1	Stainless Steel Sheet	PVC Coated
4	Gland	1	Stainless Steel	AISI 304
5	Packing Ring	–	PTFE	–
6	Ball	1	C.S.S.	ASTM A351 Gr. CF8
7	Body Connector	1	C.S.S.	ASTM A351 Gr. CF8
8	Gasket	1	PTFE	–
9	Seat	2	PTFE	–
10	Body	1	C.S.S.	ASTM A351 Gr. CF8

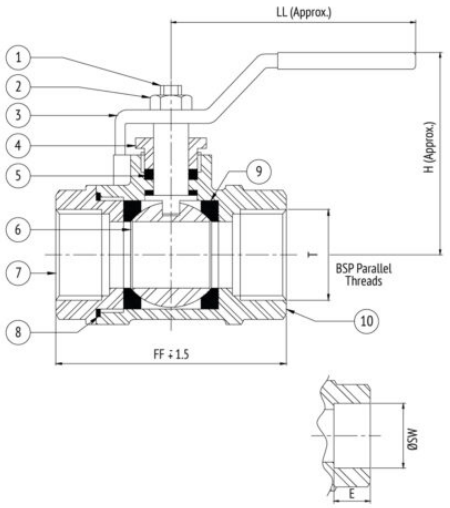

Dimensional Data

Size (mm)	FF	LL	H	T	E	ØSW
8	60	100	50	1/4”	9.5	14.6 / 14.2
10	60	100	50	3/8“	9.5	18.0 / 17.6
15	60	125	50	1/2”	9.5	22.2 / 21.8
20	75	125	55	3/4”	12.5	27.2 / 27.6
25	85	150	60	1”	12.5	34.3 / 33.9
32	95	170	75	1.1/4”	12.5	43.1 / 42.7
40	105	220	95	1.1/2”	12.5	49.2 / 48.8
50	125	260	100	2”	16	61.7 / 61.2

Atam Valves Private Limited
1051, Outside Industrial Area,
Jalandhar – 144004. Punjab. INDIA

https://www.atamvalves.in

Phone : +91 181 5001111
Fax: +91 181 2290611
Email : sales@atamfebi.com