

## AV-128 Cast Iron Kinetic Type Air Release Valve (Flanged Ends) Type DK

### Features

Flanged Ends as per IS 1538 (Undrilled)

### Test Pressure

Body : 1.5 MPa (Hyd.)

Seat : 1.0 MPa (Hyd.)

### Product Specification

IS 14845


### Suitability

Water, Oil

Photo Not Available

### Material Combination

P.No.	Name of Part	Material	Specification
1	Body	Cast Iron	IS 210 Gr. FG 200
2	L.P. Float	Rubber Coated Wood	-
3	Joint Support Ring	Cast Iron	IS 210 Gr. FG 200
4	L.P. Seat Ring	Neoprene Rubber	-
5	L.P. Cover	Cast Iron	IS 210 Gr. FG 200
6	Splash Cover	Cast Iron	IS 210 Gr. FG 200
7	H.P. Orifice	Bronze	IS 318 Gr. LTB2
8	H.P. Cover	Cast Iron	IS 210 Gr. FG 200
9	Gasket	Rubber	IS 638 Type B
10	H.P. Float	Rubber Coated Wood /S.S.	-

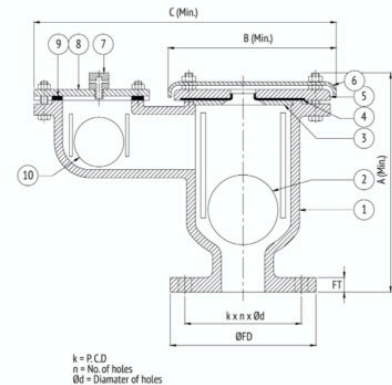

### Dimensional Data

Nominal Size	A	B	C	ØFD	FT	k	n	Ød ±2
15	280	211	352	165	16	125	4	19
20	305	236	373	200	21	160	4	19
25	360	280	424	220	22	180	8	19
32	487	450	674	285	23	240	8	23
40	700	506	739	340	24.5	295	8	23