

AV-269 Cast Iron Ball Float Steam Trap Valve

Features

Horizontal Type, Side Inlet Side Outlet, SS working parts
Screwed Female BSP Parallel Threads to (BS-21)

Test Pressure

Body : 300 Psig (Hyd.) Steam : 150 Psig
Max. Working Pressure : 150 Psig
Max. Working Temp. : 220°C


Suitability

Water, Steam, Oil



Material Combination

P.No.	Name of Part	Material	Specification
1	SLR Assembly	Stainless Steel	AISI 304
2	Cover	Cast Iron	IBR 86 TO 93 Gr.A
3	Seat Assembly	Stainless Steel	AISI 304
4	Ball Float	Stainless Steel	AISI 304
5	Washer	Copper	-
6	Bolts & Nuts	Carbon Steel	-
7	Nipple	Stainless Steel	AISI 410
8	Gasket	C.A.F.	-
9	Body	Cast Iron	IBR 86 TO 93 Gr.A

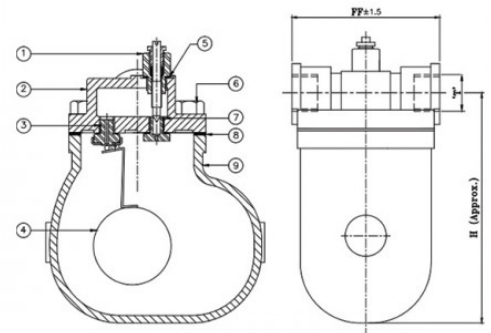

Dimensional Data

Nominal Size (mm)	FF ±1.5	H	T
1" (25)	140	200	1"
1 1/2" (40)	273	250	1 1/2"