

## AV-115 Bronze Horizontal Lift Check Valve (Screwed Ends) Class 2

### Features

Screwed in Cover, Guided Disc, Screwed Female parallel Threads to IS 554

### Test Pressure

Body : 2.4 MPa (Hyd.)

Seat : 1.6 MPa (Hyd.)

Max. Working Pressure : 1.6 MPa (Hyd.)

Max. Working Temp. : Upto 45°C

### Testing Standard

IS-778


### Suitability

Water, Oil



### Material Combination

P.No.	Name of Part	Material	Specification
1	Body	Bronze	BS EN 1982 Gr. CC 491K / IS 318 Gr. LTB2
2	Disc	Bronze	BS EN 1982 Gr. CC 491K / IS 318 Gr. LTB2
3	Cover	Bronze	BS EN 1982 Gr. CC 491K / IS 318 Gr. LTB2

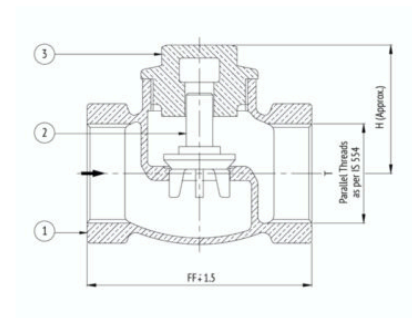

### Dimensional Data

Nominal Size (mm)	FF	T	H
15	60	1/2"	40
20	70	3/4"	47
25	80	1"	55
32	95	1.1/4"	60
40	110	1.1/2"	65
50	125	2"	80
65	160	2.1/2"	90
80	180	3"	100
100	216	4"	130