

AV-18 Bronze Asbestos Packed Water Level Gauge Cock

Features

Screwed Ends inlet Male BSP Parallel Threads as per BS 21, Screwed Male BSP Threads to BS-21

Test Pressure

Body : 300 Psig (Hyd.)

Max. Body Pressure : 150 Psig at 220°C (Steam)

Note

Other Screwed End Specification can be provided on request.


Suitability

Water, Steam, Oil

Photo Not Available

Material Combination

P.No.	Name of Part	Material	Specification	Nos.
1	Top Plug	Bronze	IBR 282(a)(iv) Gr. B	1
2	Gasket	C.A.F.	IS 2712	1
3	Nut	Bronze	IBR 282(a)(iv) Gr. B	2
4	Top Arm	Bronze	IBR 282(a)(iv) Gr. B	1
5	Gland Packing	Moulded Graphited	-	-
6	Gland	Bronze	IBR 282(a)(iv) Gr. B	2
7	Gland Nut	Bronze	IBR 282(a)(iv) Gr. B	2
8	Glass Tube	Glass	-	1
9	Lower Tube	Bronze	IBR 282(a)(iv) Gr. B	1
10	Drain Valve Body	Bronze	IBR 282(a)(iv) Gr. B	1
11	Plug Nut	Bronze	IBR 282(a)(iv) Gr. B	3
12	Plug	Bronze	IBR 282(a)(iv) Gr. B	3
13	Boptom Nut	Bronze	IBR 282(a)(iv) Gr. B	3
14	Drain Nut	Bronze	IBR 282(a)(iv) Gr. B	1
15	Nozzle	Bronze	IBR 282(a)(iv) Gr. B	1
16	Locking Nut	Bronze	IBR 282(a)(iv) Gr. B	2

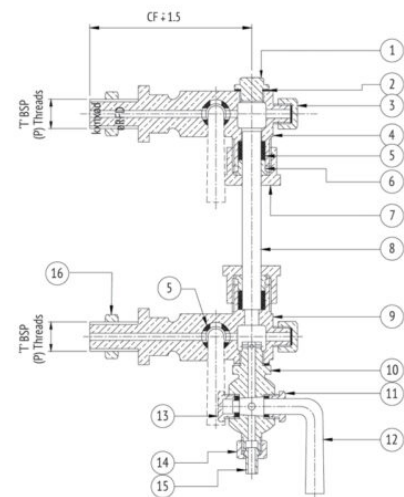

Dimensional Data

Nominal Size	CF	T	Weight (Kgs.)
10	88	3/8"	-
15	88	1/2"	-
18	125	5/8"	-
20	125	3/4"	4.190