

AV-210 Bronze Horizontal Lift Check Valve (Screwed Ends)

Features

Screwed in Cover, Renewable Stainless Steel Seat & Disc
Screwed Female BSP Taper Threads BS 21

Test Pressure

Test Pressure : 500 Psi g (Hyd.)
Max. Steam working Pressure : 250 Psig
Max. Working Temp. : 225°C


Suitability

Water, Steam



Material Combination

P.No.	Name of Part	Material	Specification
1	Body	Gun Metal	IBR 282 (a) (iv) Gr.B / BSEN 1982 Gr. CC491K
2	Body Seat Ring	Stainless Steel	ASTM A276 TYPE 410
3	Disc	Stainless Steel	ASTM A276 TYPE 410
4	Cover	Gun Metal	IBR 282 (a) (iv) Gr.B / BSEN 1982 Gr. CC491K

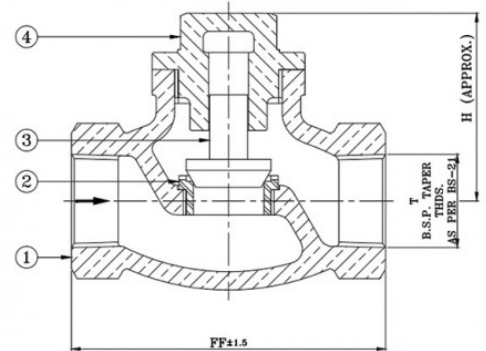

Dimensional Data

Nominal Size (mm)	FF ±1.5	H	T
15	83	55	1/2"
20	95	55	3/4"
25	111	64	1"
32	133	74	1.1/4"
40	150	80	1.1/2"
50	178	90	2"