

AV-215 Bronze Sleeve Packed Water Level Gauge (Screwed Ends)

Features

With automatic shut off device in the water arm (LH or RH), Screwed Ends

Test Pressure

Max. BOP : 250 Psi g

Max. Working Temp. : 225°C

Body Test Pressure : 500 Psig (Hyd.)


Suitability

Water



Material Combination

P.No.	Name of Part	Material	Specification
1	Plug	Bronze	IBR 282 (a) (iv) Gr.B
2	Gasket	C.A.F	-
3	Upper Arm	Bronze	IBR 282 (a) (iv) Gr.B
4	Cone	Rubber	-
5	Handle	M.I.	IS : 14329
6	Glass Tube	Glass	(At Customer Scope)
7	Nut	Bronze	IBR 282 (a) (iv) Gr.B
8	Lower Arm	Bronze	IBR 282 (a) (iv) Gr.B
9	Ball	Stainless Steel	AISI 304
10	Sleeve	Moulded Asbestos	-
11	Drain Valve Body	Bronze	IBR 282 (a) (iv) Gr.B
12	Union Nut	Bronze	IBR 282 (a) (iv) Gr.B
13	Nipple	Bronze	IBR 282 (a) (iv) Gr.B
14	Stem	Stainless Steel	ASTM A276 TYPE 410
15	Nut	Carbon Steel	-
16	Bottom Nut	Bronze	IBR 282 (a) (iv) Gr.B
17	Locking Nut	Bronze	IBR 282 (a) (iv) Gr.B

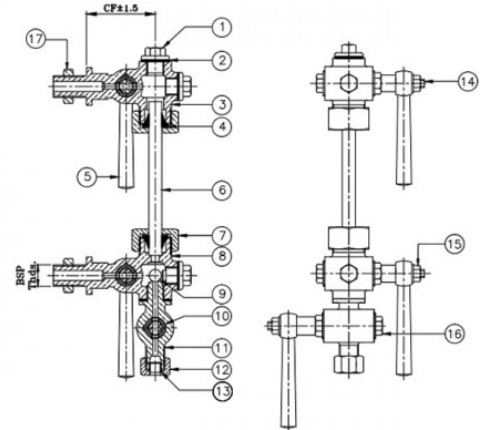

Dimensional Data

Nominal Size (mm)	CF ±1.5
15 (1/2")	80
16 (5/8")	90
20 (3/4")	90