

## AV-216 Bronze Asbestos Packed Water Level Gauge (Screwed Ends)

### Features

Left hand or Right hand operation, Screwed Ends

#### Test Pressure

Max. BOP : 150 Psig (Steam)

Max. Working Temp. : 220°C

Body Test Pressure : 300 Psig (Hyd.)


#### Suitability

Water



### Material Combination

P.No.	Name of Part	Material	Specification
1	Plug	Bronze	IBR 282 (a) (iv) Gr. B
2	Gasket	CAF	-
3	Nut	Bronze	IBR 282 (a) (iv) Gr. B
4	Upper Arm	Bronze	IBR 282 (a) (iv) Gr. B
5	Gland Packing	Graphited Asbestos	-
6	Gland	Bronze	IBR 282 (a) (iv) Gr. B
7	Gland Nut	Bronze	IBR 282 (a) (iv) Gr. B
8	Glass Tube	Glass	(At Customer Scope)
9	Lower Arm	Bronze	IBR 282 (a) (iv) Gr. B
10	Drain Valve Body	Bronze	IBR 282 (a) (iv) Gr. B
11	Nut	Bronze	IBR 282 (a) (iv) Gr. B
12	Plug	Bronze	IBR 282 (a) (iv) Gr. B
13	Ring	CAF	-
14	Union Nut	Bronze	IBR 282 (a) (iv) Gr. B
15	Nozzle	Bronze	IBR 282 (a) (iv) Gr. B

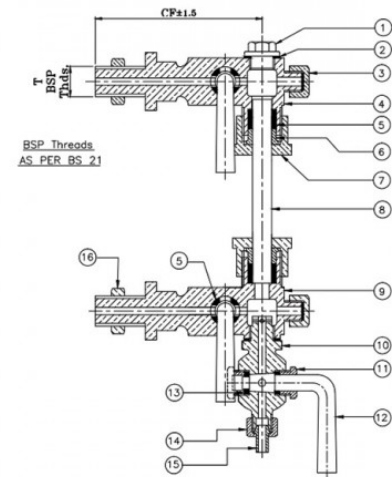

### Dimensional Data

Nominal Size (mm)	CF ± 1.5	T
15	88	1/2"
16	125	5/8"
20	125	3/4"