

AV-216A Bronze Asbestos Packed Water Level Gauge (Flanged Ends)

Features

Left hand or Right hand operation
Flanged ends as per BS-10, Table-F

Test Pressure

Max. B.O.P. : 150 Psig (Steam)
Max. Working Temp. : 220°C
Body Test Pressure : 300 Psig (Hyd.)


Suitability

Water



Material Combination

P.No.	Name of Part	Material	Specification
1	Plug	Bronze	IBR 282 (a) (iv) Gr. B
2	Gasket	CAF	-
3	Nut	Bronze	IBR 282 (a) (iv) Gr. B
4	Upper Arm	Bronze	IBR 282 (a) (iv) Gr. B
5	Gland Packing	Graphited Asbestos	-
6	Gland	Bronze	IBR 282 (a) (iv) Gr. B
7	Gland Nut	Bronze	IBR 282 (a) (iv) Gr. B
8	Glass Tube	Glass	(At Customer Scope)
9	Lower Arm	Bronze	IBR 282 (a) (iv) Gr. B
10	Drain Valve Body	Bronze	IBR 282 (a) (iv) Gr. B
11	Nut	Bronze	IBR 282 (a) (iv) Gr. B
12	Plug	Bronze	IBR 282 (a) (iv) Gr. B
13	Ring	CAF	-
14	Union Nut	Bronze	IBR 282 (a) (iv) Gr. B
15	Nozzle	Bronze	IBR 282 (a) (iv) Gr. B

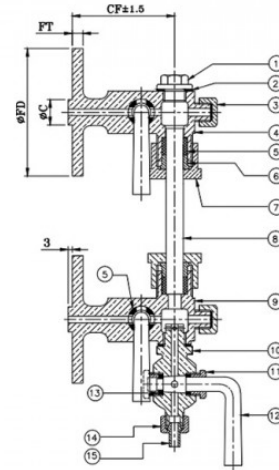

Dimensional Data

Nominal Size (mm)	CF ± 1.5	ØFD	FT	ØC
15	77	95.3	7.9	19
20	96	101.6	7.9	26.4