

AV-301A F.S.S. (F304) Gate Valve, Class-800

Features

Reduced Bore, Bolted Bonnet, O/S & Yoke Type, Rising Stem, Renewable Seat, Solid Wedge, SS 304 Trim
Screwed Female NPT Threads as per ASME B1.20.1 .
Product Standard : API-602/ EN-15761

Test Pressure

Body : 207 Bar (Hyd.)
Seat : 152 Bar (Hyd.)
Testing Standard : API-598/ BSEN-12266-1


Suitability

Water, Steam, Oil



Material Combination

P.No.	Name of Part	Material	Specification
		F304	F304
1	Handwheel Retaining Nut	S.S. 304	-
2	Handwheel	M.I.	ASTM A338
3	Stem	Stainless Steel	ASTM A276 TYPE 304
4	Yoke Sleeve	Stainless Steel	ASTM A276 TYPE 304
5	Stud Bolts & Nuts	Stainless Steel	ASTM A193 Gr.B8 & ASTM A194 Gr.8
6	Gland Flange	Forged Stainless Steel	ASTM A182 F304
7	Gland Follower	Stainless Steel	ASTM A276 TYPE 304
8	Gland Packing	Flexible Graphite	-
9	Bonnet	Forged Stainless Steel	ASTM A182 F304
10	Body Seat Ring	Stainless Steel	ASTM A276 TYPE 304
11	Wedge	Stainless Steel	ASTM A182 F304
12	Body	Forged Stainless Steel	ASTM A182 F304
13	Stud Bolts & Nuts	Stainless Steel	ASTM A193 Gr.B8 & ASTM A194 Gr.8
14	Gasket	Spiral Wound S.S 304 Graphoil	-

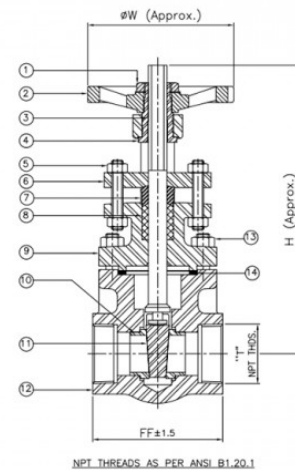

Dimensional Data

Nominal Size (mm)	FF ±1.5	H	ØW	T
10	80	132	80	3/8"
15	80	132	80	1/2"
20	88	142	80	3/4"
25	100	175	90	1"
32	104	215	152	1.1/4"
40	104	215	152	1.1/2"
50	116	245	152	2"