

AV-305B F.S.S. (F316) Horizontal Lift Check Valve, Class-800

Features

Reduced Bore, Bolted Cover, Renewable Seat & Disc, SS 316 Trim
Screwed Female NPT Threads as per ASME B1.20.1 .
Product Standard : API-602/ EN-15761

Test Pressure

Body : 207 Bar (Hyd.)
Seat : 152 Bar (Hyd.)
Testing Standard : API-598/ BSEN-1266-1


Suitability

Water, Steam, Oil



Material Combination

P.No.	Name of Part	Material	Specification
		F316	F316
1	Studs and Nuts	Stainless Steel	ASTM A193 Gr. B8 & ASTM A194 Gr. 8
2	Cover	Forged Stainless Steel	ASTM A182 F316
3	Gasket	Spiral Wound S.S. 316 Graphoil	-
4	Disc	Stainless Steel	ASTM A182 F316/ ASTM A276 Type 316
5	Body Seat Ring	Stainless Steel	ASTM A276 TYPE 316
6	Body	Forged Stainless Steel	ASTM A182 F316

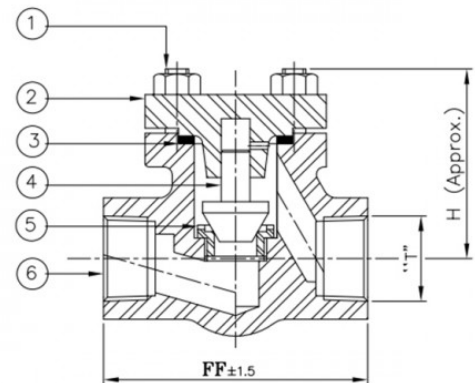

Dimensional Data

Nominal Size (mm)	FF ±1.5	H	T
10	80	58	3/8"
15	80	55	1/2"
20	88	62	3/4"
25	100	85	1"
40	145	98	1.1/2"
50	170	120	2"