AV-256 Cast Iron Y-Type Strainer, Flanged Ends

Features

Body Material Cum Standard	Cast Iron (IBR 86 to 93 Gr. A)
Product Description	Y-Type, Bolted Cover
Trim	Stainless Steel (AISI 304), Screen Having 1.5 mm Diameter Perforations
End Details	Flanged Ends as per BS-10 Table-F Flat Face (Drilled)
Test Pressure	Body: 300 Psig (Hyd.)
Max. Working Pressure	150 Psig (Steam)
Max. Working Temperature	220°C



Notes


Test Certificate in Form III-C as per IBR is furnished with every supply.

Suitability

Water, Steam, Oil

Material Combination

S.No	Description	No.	Material	Specifications
1	Body	1	Cast Iron	BS EN 1561 Gr. GJL 220 / IBR 86 to 93 Gr.A
2	Strainer	1	Stainless Steel	Type 304 (1mm Dia perforation)
3	Gasket	1	C.A.F.	–
4	Cover	1	Cast Iron	BS EN 1561 Gr. GJL 220 / IBR 86 to 93 Gr.A
5	Studs & Nuts	To Suit	Carbon Steel	–
6	Gasket	1	C.A.F.	–
7	Drain Plug	1	Cast Iron	BS EN 1561 Gr. GJL 220 / IBR 86 to 93 Gr.A

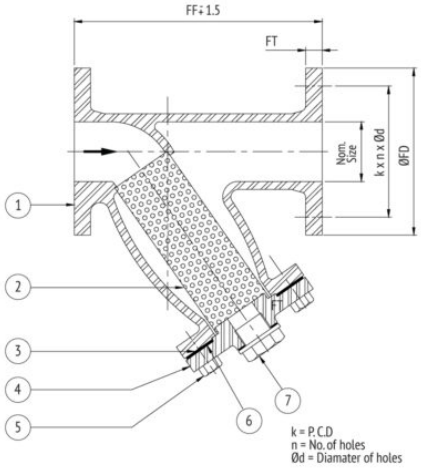

Dimensional Data

Size (mm)	FF	ØFD	k	n	Ød	FT
25	162	120.7	87.3	4	17.5	12.7
40	206	139.7	104.8	4	17.5	15.9
50	210	165.1	127	4	17.5	19.1
65	248	184.2	146.1	8	17.5	19.1
80	270	203.2	165.1	8	17.5	19.1
100	381	228.6	190.5	8	17.5	22.3
125	416	279.4	235	8	22.3	25.4
150	451	304.8	260.4	12	22.3	25.4
200	523	368.3	323.9	12	22.3	28.6

Atam Valves Private Limited
1051, Outside Industrial Area,
Jalandhar – 144004. Punjab. INDIA

https://www.atamvalves.in

Phone : +91 181 5001111
Fax: +91 181 2290611
Email : sales@atamfebi.com