

AV-30 Gun Metal Needle Valve

Features

Screwed in Bonnet, Inside Screw, Rising Stem, Integral Seat, Screwed Female BSP Parallel Threads to BS:21

Test Pressure

Body : 300 Psig (Hyd.)
Seat : 150 Psig (Hyd.)

Note

Please follow latest year for standard.


Suitability

Water, Oil, Air



Material Combination

P.No.	Name of Part	Material	Specification
1	Body	Gun Metal	BSEN 1982 Gr. CC 491K / IS 318 Gr. LTB2
2	Bonnet	Gun Metal	BSEN 1982 Gr. CC 491K / IS 318 Gr. LTB2
3	Gland Nut	Gun Metal	BSEN 1982 Gr. CC 491K / IS 318 Gr. LTB2
4	Gland	Gun Metal / Brass	BSEN 1982 Gr. CC 491K / IS 318 Gr. LTB2
5	Stem	H.T. Brass	DIN 12164 Gr. CW 721R / IS 6912 Gr. FHTB
6	Handwheel	Cast Iron	BS 1561 Gr. GJL 200 / IS 210 Gr. FG 200
7	Washer	Carbon Steel	-
8	Screw / Bolt	Carbon Steel	-
9	Packing	Asbestos	-

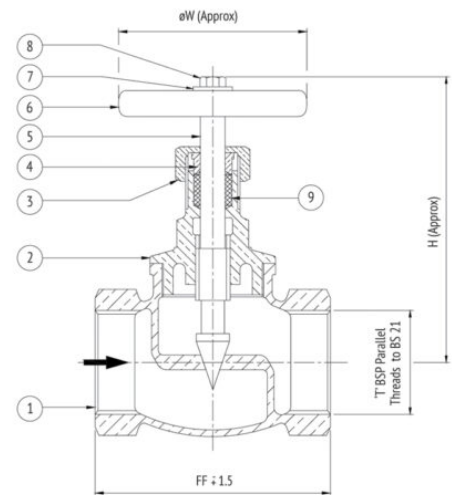

Dimensional Data

Nominal Size (mm)	FF	T	H	ØW
10	39	3/8"	71	44
15	50	1/2"	77	50
20	55	3/4"	92	62
25	68	1"	98	66